

**AVer MD-20**

## Wireless Miracast Dongle

The AVer MD-20 is designed for using in both classrooms and meeting rooms. It is compatible with the AVerVision M15W visualizer via Miracast® and supports all major operating systems to enable wireless audio and video sharing from various devices to the big screen. Enjoy a whole new wireless transmission experience, and embrace diverse presentation methods.



4K Ultra HD



iOS  
Wireless Mirroring



Android™  
Wireless Mirroring



Windows®/Mac®/Chrome™  
ScreenShare



5 GHz Wi-Fi

## PRODUCT SPECIFICATIONS

# – AVer MD-20

Wireless Miracast Dongle

### ❖ CPU

- 1 GHz dual core

### ❖ Output Resolution

- Up to 4K at 30 Hz / 1080p 60 Hz

### ❖ I/O

- HDMI out (HDMI 1.4)
- USB Type-C connector for DC 5V

### ❖ Wi-Fi

- 802.11n (@5 GHz) / ac 2T2R, max. bandwidth 866 Mbps (5 GHz)

### ❖ Wi-Fi Frequency

- 5 GHz: 5.150 - 5.825 GHz (may vary depending on location)

### ❖ Power

- DC 5V, 1.5A

### ❖ Power Consumption

- Standby: 2 Watts (approx.)
- Working: 5 Watts (approx.)

### ❖ LED Indication

- Power, Wi-Fi status

### ❖ Key

- Reset button

### ❖ Working Temperature

- 0 - 40 °C

### ❖ Storage Temperature

- -20 - 70 °C

### ❖ Dimensions (W x H x D)

- 87.5 x 12.0 x 32.0 mm

### ❖ Net Weight

- 100 g

### ❖ Warranty

- 1 year


### ❖ Package Contents

- MD-20 unit, HDMI extension cable, USB Type-C power cable, Quick Start Guide

\* Specifications may vary depending on location and are subject to change without notice.

## Cross-Platform Screen Sharing

The MD-20 allows cross-platform wireless mirroring and supports iOS, Mac® OS, Android™, Windows®, and Chrome™ operating systems. Users can seamlessly display videos and images from all kinds of devices without worrying about compatibility or cable clutter.

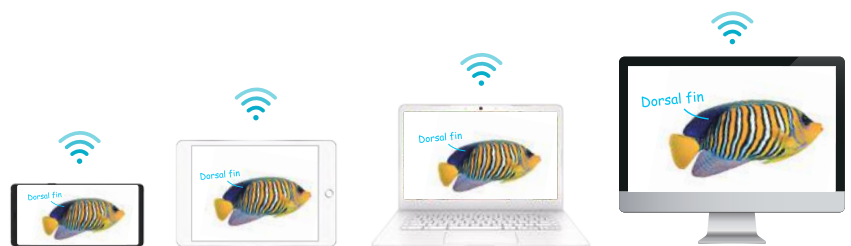

## Hardware Appearance

Front



Side



# AVer

©2020 AVer Information Inc. All rights reserved.  
All brands and logos are trademarks of their respective companies.

www.aver.com

CE FC RoHS  
COMPLIANT

Distributor/Dealer