

AV500 3-port Mini Powerline Adapter 3-Pack Kit

TL-PA4030T KIT

⦿ Features:

Data transfer rate up to 500Mbps over electrical wires, ideal for HD video streaming

3 Ethernet (RJ45) ports

No new wires or drilling required, just using existing electrical wires

No setup required, simply plug and play

Up to 300 meters range over the household power circuit, for better performance through walls or across floors

128-bit AES encryption easily at a push of "Pair" Button

Supports IGMP managed multicast IP transmission, optimizes IPTV streaming

Plug type: EU, UK



* Actual data will vary because of the network conditions and environment factors.


⦿ Description:

TP-LINK's TL-PA4030T KIT AV500 3-port Mini Powerline Adapter 3-Pack Kit takes advantage of your home's existing electrical wires to transfer data, while simultaneously transferring traditional power. That means, with no additional wiring required, users can simply plug the TL-PA4030T KIT into existing power sockets and instantly establish a networking infrastructure. With its miniature design, you'll enjoy the flexibility of being able to plug it in anywhere in your home!

⦿ Specifications:

| Hardware Features | |
|--------------------------|---|
| Standards and Protocols | HomePlug AV, IEEE802.3, IEEE802.3u |
| Interface | 3 * 10/100Mbps Ethernet Port |
| Plug Type | EU, UK |
| Button | Pair Button |
| LED Indicator | PWR, PLC, ETH |
| Dimensions (W x D x H) | 3.6 x 2.2 x 1.2 in.(93x56x30 mm) |
| Range | 300M in house |
| Software Features | |
| Modulation Technology | OFDM |
| Encryption | 128-bit AES Encryption |
| Others | |
| Certifications | CE, FCC, RoHS |
| System Requirements | Windows 2000/XP/2003/Vista, Windows 7,8, Mac, Linux |
| Environment | Operating Temperature: 0°C~40°C (32°F~104°F) |
| | Storage Temperature: -40°C~70°C (-40°F~158°F) |
| | Operating Humidity: 10%~90% non-condensing |
| | Storage Humidity: 5%~90% non-condensing |

⦿ Diagram:

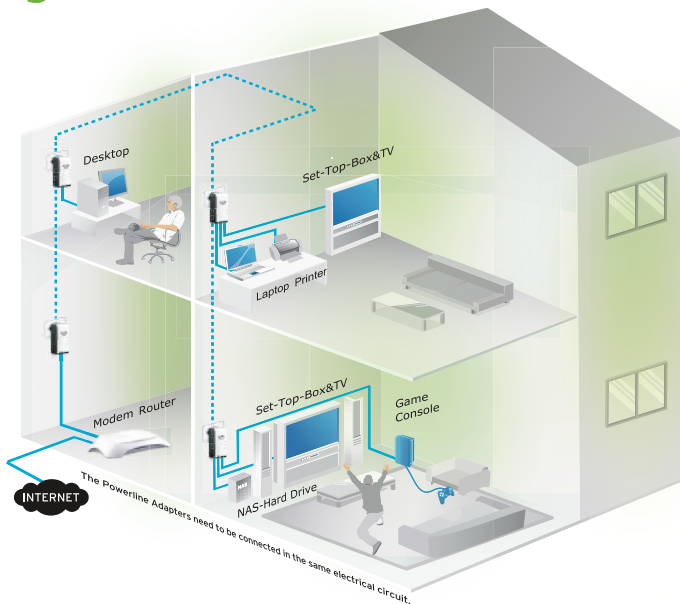

Package:

- AV500 3-port Mini Powerline Adapter TL-PA4030 * 3
- 2-meter RJ-45 Ethernet Cable * 3
- Quick Installation Guide
- Resource CD

* Powerline adapters should be deployed on the same circuit and in set of two or more. The first connects to the router with additional adapters located elsewhere around the home or office to enable connectivity in those locations.