Yealink

Cordless VoIP solution for small businesses

- · High-end ID design
- \cdot Exceptional HD sound with wideband technology
- \cdot Up to 4 simultaneous voice calls
- \cdot Up to 5 DECT cordless handsets
- · Up to 5 Multiple Lines
- \cdot 2.4" 240 x 320 color screen with intuitive user interface
- \cdot Up to 30 hours talk time, Up to 400 hours standby time
- \cdot Quick charging: 10 mins charge time for 2 hours talk time
- · Support USB charging
- \cdot Headset connection via 3.5 mm jack
- · Charger wall mountable
- \cdot New belt clip with better user experience






Yealink W56P is the next-generation SIP Cordless Phone System combining quality, reliability and flexibility.

Offering the convenience of cordless with a simple add-on device without losing the SIP features, it brings a seamless call management for our users while "on-the-go". With more functions, lines and mobility, it empowers users with the convenience of wireless communication along with the widely accepted benefits and feature richness of Voice-over-IP telephony.

In addition, the Yealink W56P delivers the typical benefits of the DECT world such as long talk time, high standby time and superior speech quality, providing excellent value for money and is ideally suited for small and medium-sized businesses.

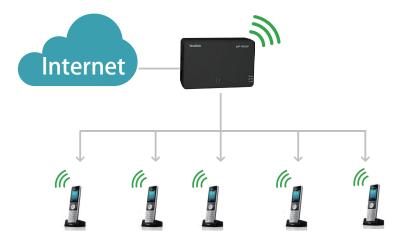

· Up to 5 DECT Cordless Handsets Per base depending on your needs

- DECT radio coverage up to 50m indoors and 300m outdoors
- \cdot Energy-saving ECO features

DECT technology:

CAT-iq2.0 focuses on high quality Audio VoIP (wideband), as well as low bit - rate data applications, fully backward compatible to DECT GAP

Yealink

IP DECT Phone W56P

Phone Features

- \cdot Up to 4 simultaneous calls
- \cdot Up to 5 handsets, up to 5 VoIP accounts
- · Handset select for receiving call
- · Handset and Number select for making call
- · Paging, intercom, auto answer
- · Call hold, call transfer, 3-way conferencing
- \cdot Switching between calls
- \cdot Call waiting, mute, DND
- \cdot Caller ID display, redial
- · Anonymous call, anonymous call rejection
- · Call forward (always/busy/no answer)
- · Speed dial, voicemail, silence
- · Message Waiting Indication (MWI)
- Local phonebook for up to 500 entries (store in the base)
- · Remote phonebook/LDAP
- \cdot Phonebook search/import/export
- · Call history utgoing/missed/accepted)
- \cdot Direct IP call without SIP proxy
- · Reset to factory, reboot
- \cdot Keypad lock, emergency call
- · Dial Plan, music on hold
- · Broadsoft directory, BroadSoft Call Log
- \cdot Broadworks feature key synchronization
- · Shared Call Appearance (SCA)

Personalization

- · 9 ringer melodies
- · Screen saver
- · Multi-language support

Management

- \cdot Auto-provision via FTP/TFTP/HTTP/HTTPS
- · Auto-provision with PnP
- · Handset upgrade: OTA (Over-The-Air)
- · Configuration: browser/phone/auto-provision
- · Trace package and system log export

Voice and Codecs Features

- Full-duplex speakerphone
 Receiver volume control: 5 steps
 Ringer volume control: 5 steps+off
 Multiple advisory tones
 Acoustic warning for low battery status
 DTMF
 Wideband codec: G.722
 Narrowband codec:

 G.711µ/A, G.723, G.726, G.729, iLBC
 VAD, CNG, AEC, PLC, AJB
 Support VQ-RTCPXR (RFC6035)

 Network Features

 SIP v1 (RFC2543), v2 (RFC3261)
 CNTD (NTD
- SNTP/NTP
 VLAN (802.1Q and 802.1P)
 802.1x, LLDP, PPPoE
 STUN Client (NAT Traversal)
 UDP, TCP
 IP assignment: static/DHCP
- · Support outbound proxy server backup

Security

- · Open VPN
- · Transport Layer Security (TLS)
- · HTTPS (server/client)
- ·SRTP (RFC3711)
- · Digest authentication using MD5
- · Secure configuration file via AES
- encryption
- ·Support SHA256/SHA512/SHA384
- · Admin/Var/User 3-level configuration mode

Connectors

- · CAT-iq2.0
- ·1 x RJ45 10/100M Ethernet port
- · Power over Ethernet (IEEE 802.3af)
- · Headset jack (3.5 mm)

Physical Features

- Indoor Range: 20m~50m
 (The ideal distance is 50m)
 Outdoor Range: 300m
- (In ideal conditions)
- · Standby Time: 400h (In ideal conditions)
- · Talk Time: 30h
- · 2.4'' 240x320 pixels color display
- · Desktop or wall mountable
- · LCD backlit, key backlit
- · Energy-saving ECO mode/ECO Mode+
- 12 key numerical keypad, 5 navigation keys 2 softkeys, 6 function keys, 6 shortcut keys
- · 3 LEDs on Base: 1 x power, 1 x Network, 1 x Call
- · Base station: DC 5V/600mA Output
- · Charger: DC 5V/600mA Output
- · Phone size: 176mm x 50mm x 24mm
- · Base station size:
- 153mm x 53mm x 23mm
- \cdot Operating humidity: 10 \sim 95%
- \cdot Operating temp: -10 \sim +50°C

Package Features

 \cdot 1 x handset, 1 x base station, 1 x belt clip

- $\cdot \ensuremath{\, 1}$ x rechargeable lithium battery,
- \cdot 1 x charger cradle, 2 x power adapter
- [.] 1 x ethernet cable, 1 x Quick Start Guide
- · Qty/CNT: 10pcs
- · Giftbox size: 203mm*196mm*95mm
- · Carton meas: 497mm*413mm*207mm
- N.W: 7.8kg
- G.W: 8.7kg

Special Features

· Increase range with up to 6 repeaters

Certifications

